

ALL ELECTRIC SCISSOR LIFTS

0608ME ALL (1932ME ALL) / 0808E ALL (2732E ALL)

Compliant with CE/ANSI/CSA standards

PRODUCT HIGHLIGHTS

Hydraulic Oil Free & Environment-friendly


- Zero hydraulic components used makes machine hydraulic oil free, clean operation with zero risk of hydraulic oil leak in job sites
- Zero emissions, low noise and environment-friendly, ideal for stringent working environment such as data center, dust-free workshop and hospital etc

High Efficiency

- Replacing hydraulic cylinders with electric cylinders, consumes less energy and runs for longer time, greatly improving work efficiency
- Side forklift pockets design makes it flexible and greatly improves transfer and transportation efficiency

Low Cost for Maintenance & Operation

- Universal components from E-drive slab scissors are used on this machine decreases total cost of ownership
- AC brushless drive motor and AGM maintenance free batteries come as standard
- Unique bumper rails will protect decals and paint well making machine look like new

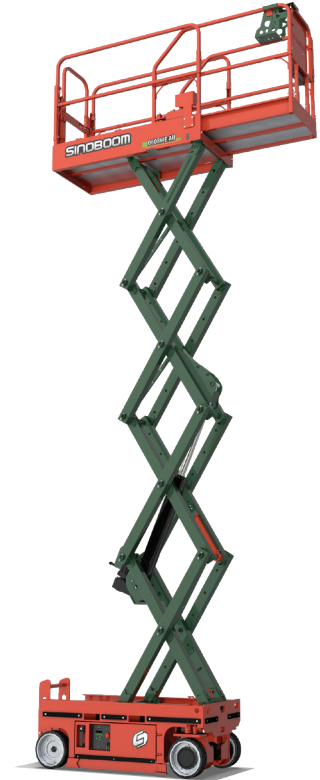

Standard Features		
2WD×2WS	Maintenance-free battery	Fault diagnosis system
Solid non-marking tires	Proportional control	Emergency lowering system
Emergency stop system	Electrophoretic painting	Tilt protection system
Flashing beacon	Side/rear forklift pockets	Lifting and tie down points
Foldable guardrail	Automatic pothole protection	Overload sensing system
Drivable at full height	Bumper rails	Manual storage box
Horn & buzzer	AC power to platform	Auto braking system
AC drive motor	Full size swing gate	Telematics-ready connector
Weighing System		
Options & Accessories		
RCBO	Platform work light	Overhead anti-collision device
Footswitch	Charging transfer wire	

SINOBOOM™

PARTNERS IN ACCESS™

SINOBOOM.COM | SALES@SINOBOOM.COM

NO.128 EAST JINZHOU AV., NINGXIANG HI-TECH INDUSTRY PARK, CHANGSHA, HUNAN, CHINA, 410600

ALL ELECTRIC SCISSOR LIFTS

0608ME ALL (1932ME ALL) / 0808E ALL (2732E ALL)

Compliant with CE/ANSI/CSA standards

Model	0608ME ALL (1932ME ALL)	0808E ALL (2732E ALL)
Dimensions		
Max Working Height (Indoor/Outdoor)	7.8 m (25'7")	10.1 m/8 m (33'2"/26'3")
A Max Platform Height (Indoor/Outdoor)	5.8 m (19')	8.1 m/6 m (26'7"/19'8")
B Platform Extension	0.9 m (3')	0.9 m (3')
C Length-Stowed	1.8 m (5'11")	2.46 m (8')
D Machine Width	0.81 m (2'7.9")	0.83 m (2'8.7")
E Height-Stowed (Rails Folded)	1.88 m (6'2")	1.96 m (6'5")
E Height-stowed (Rails Unfolded)	2.14 m (7')	2.36 m (7'9")
F Wheelbase	1.334 m (4'4")	1.88 m (6'2")
Ground Clearance (Pothole Guard Stowed)	0.061 m (2.4")	0.1 m (4")
Ground Clearance (Pothole Guard Deployed)	0.024 m (0.95")	0.025 m (0.98")
Platform Size (L×W×H)	1.64 m×0.76 m×1.1 m (5'4.6"×2'6"×3'7")	2.30 m×0.8 m×1.1 m (6'6.5"×2'7.5"×3'7")
Performance		
Platform Capacity	230 kg (507 lbs)	250 kg (551 lbs)
Extension Deck Capacity	120 kg (265 lbs)	120 kg (265 lbs)
Max Platform Occupants (Indoor/Outdoor)	2 Persons/1 Person	2 Persons/1 Person
Drive Speed (Stowed)	0 ~ 4 km/h (0 ~ 2.5 mph)	0 ~ 4 km/h (0 ~ 2.5 mph)
Drive Speed (Raised)	0 ~ 0.5 km/h (0 ~ 0.3 mph)	0 ~ 0.5 km/h (0 ~ 0.3 mph)
Lift Time (Unloaded)	25 s~30 s	40 s~45 s
Lower Time (Unloaded)	25 s~30 s	40 s~45 s
Gradeability	25%	25%
Max Allowable Inclination(Front-to-Back/ Side-to-Side)	3° /1.5°	3° /1.5°
Turning Radius (Inside/Outside)	0 m/1.62 m (0 /5'3.78")	0.61 m (2') / 2.2 m (7'2.6")
Tire Spec/Type	323×100mm (12.7×4")/solid non- marking tires	380×125 mm (15"×5")/solid non-marking tires
Power		
Drive × Steer	2 WD×2 WS	2 WD×2 WS
Drive Motor (V/kW)	24 V AC /0.6 kW	24 V AC/0.7 kW
Battery Capacity	24 V, 220 Ah (AGM Batteries)	24 V, 220 Ah, 20 hr (Lead-acid battery)
Charger (Input/Output)	100 ~ 240V AC/30A	100 ~ 240 V AC/36 A
Weight		
Weight (Indoor/Outdoor)	1,600 kg (3,527 lbs)	2,265 kg (4,994 lbs)
Standards Compliance	CE/ANSI/CSA	CE/ANSI/CSA

